


BANDO BANCOLLAN ROUND BELTS (Seamless Type)

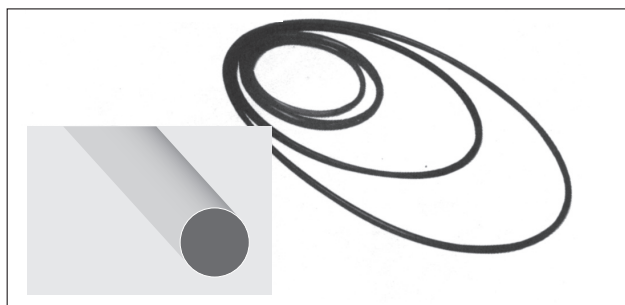

Construction


Polyurethane without tensile members

Standard Sizes

Features + Benefits

- Low starting torque
Excellent flexibility, provides smooth slip-free starts even in low temperatures.
- Easy installation
Easy to install by hand.
No retensioning needed.
- Minimal tension decay.
- High oil and ozone resistance


Size mark

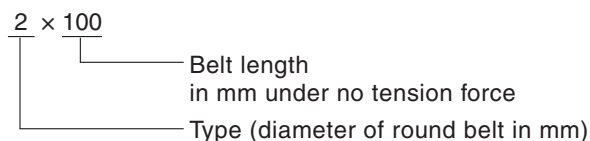

Type 2 2mm diameter		Type 3 3mm diameter		Type 4 4mm diameter		Type 5 5mm diameter	
Belt length		Belt length		Belt length		Belt length	
mm	inch	mm	inch	mm	inch	mm	inch
91.0	3.58	115.0	4.53	140.0	5.51	200.0	7.87
100.0	3.94	120.0	4.72	160.0	6.30	210.0	8.27
107.0	4.21	132.0	5.20	170.0	6.69	220.0	8.66
112.0	4.41	138.0	5.43	175.0	6.89	225.0	8.86
120.0	4.72	140.0	5.51	200.0	7.87	230.0	9.06
125.0	4.92	150.0	5.91	213.0	8.39	247.0	9.72
130.0	5.12	153.0	6.02	225.0	8.86	248.0	9.76
134.0	5.28	155.0	6.10	230.0	9.06	250.0	9.84
136.0	5.35	160.0	6.30	235.0	9.25	275.0	10.83
140.0	5.51	165.0	6.50	250.0	9.84	290.0	11.42
145.0	5.71	170.0	6.69	254.0	10.00	300.0	11.81
147.0	5.79	172.0	6.77	258.0	10.16	305.0	12.01
152.0	5.98	180.0	7.09	264.0	10.39	310.0	12.20
160.0	6.30	182.0	7.17	275.0	10.83	330.0	12.99
170.0	6.69	190.0	7.48	284.0	11.18	345.0	13.58
180.0	7.09	200.0	7.87	285.0	11.22	348.0	13.70
183.0	7.20	204.0	8.03	290.0	11.42	363.0	14.29
190.0	7.48	213.0	8.39	300.0	11.81	375.0	14.76
200.0	7.87	223.0	8.78	305.0	12.01	380.0	14.96
213.0	8.39	230.0	9.06	316.0	12.44	384.5	15.18
227.0	8.94	236.0	9.29	323.0	12.72	402.0	15.83
239.0	9.41	240.0	9.45	332.0	13.07	422.0	16.61
244.0	9.61	250.0	9.84	335.0	13.19	440.0	17.32
250.0	9.84	260.0	10.24	346.0	13.62	460.0	18.11
273.0	10.75	275.0	10.83	361.0	14.21	685.0	26.97
290.0	11.42	282.0	11.10	367.0	14.45		
444.0	17.48	285.0	11.22	370.0	14.57		
470.0	18.50	290.0	11.42	374.0	14.72		
		305.0	12.01	377.0	14.84		
		308.0	12.13	385.0	15.16		
		330.0	12.99	390.0	15.35		
		347.0	13.66	415.0	16.34		
		356.0	14.02	474.0	18.66		
		363.0	14.29	500.0	19.69		
		376.0	14.80	540.0	21.26		
		390.0	15.35				
		400.0	15.75				
		430.0	16.93				
		441.0	17.36				
		450.0	17.72				
		645.0	25.39				

BANDO BANCORD (OPEN END TYPE)

BANCORD ROUND BELTS

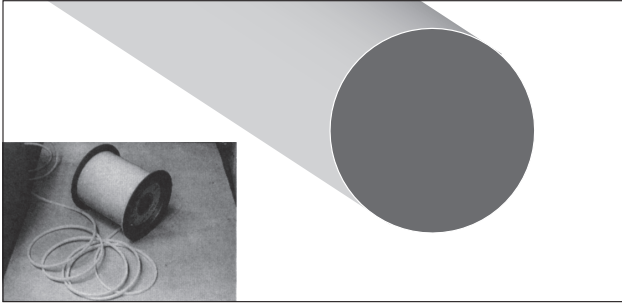

Construction

Polyurethane without tensile members

Standard Sizes


ROUND Belts

Diameter of Belt	mm	1.5	2	2.5	3	3.5	4	5	6	7	8	9	10	11	12	15	
	inch	0.06	0.08	0.10	0.12	0.14	0.16	0.20	0.24	0.28	0.31	0.35	0.39	0.43	0.47	0.60	
#480 Standard		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
#489 high modulus		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
Length / roll		#480 200m/roll #489 100m/roll						100m/roll									

V Belts

Type	Top width a	Thickness b	Angle θ
M	10.0mm	5.5mm	40°
A	12.7mm	8.0mm	40°
B	16.7mm	10.3mm	40°


BANCORD V BELTS

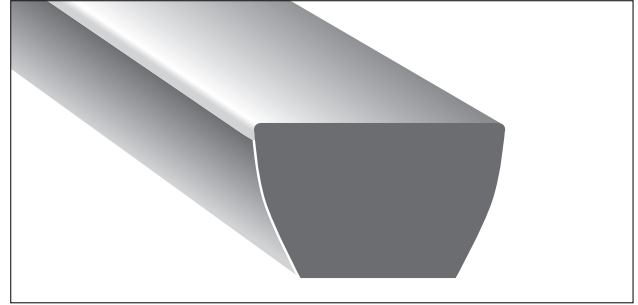

Features

Simply cut and heat-splice the belt to the required length.

BANDO BANCOLLAN (CORDLESS) FLAT BELTS

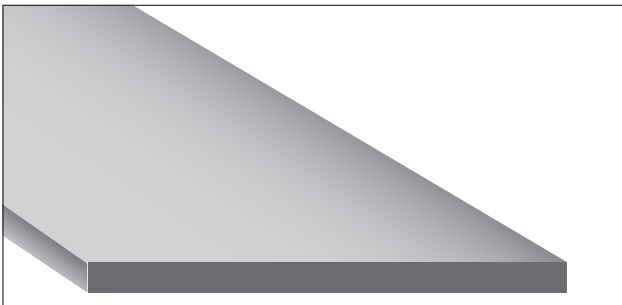


Construction

Polyurethane without tensile members


Feature + Benefits

- Smooth constant speed
Thickness tolerance is $\pm 0.0020''$ (0.05mm), so there is virtually no speed variation.
- Space saving
Minimum pulley diameter is 0.2" (5.0mm). This allows high speed ratios.

Dimensions

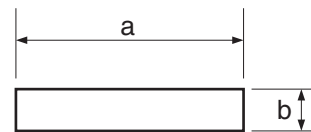

Size mark

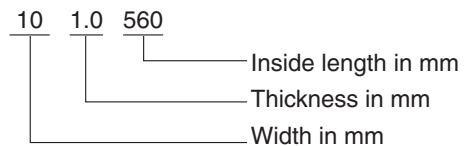

Standard Sizes

a x b (mm)	BELT INSIDE LENGTH (mm)
10x1.0	170-950 (Please contact to us for detail size)

The above belt should be installed at 6% stretch.