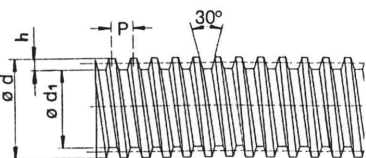





HUSILLOS Y TUERCAS

HUSILLOS	HUSILLO ROSCADO					HUSILLO LAMINADO				
	REFERENCIA	Paso P	Æ Ext. d	Æ Fondo d ₁	Altura Filete h	REFERENCIA	Paso P	Æ Ext. d	Æ Fondo d ₁	Altura Filete h
	Tr – 15/3	3	15	11.7	1.65	TrL – 14/3	3	14	10.7	1.65
	Tr – 20/4	4	20	15.5	2.25	TrL – 20/4	4	20	15.5	2.25
	Tr – 25/5	5	25	19.5	2.75	TrL – 24/5	5	24	18.5	2.75
	Tr – 30/6	6	30	23.5	3.25	TrL – 30/6	6	30	23.5	3.25
	Tr – 40/7	7	40	32.5	3.75					
	Tr – 50/8	8	50	41.5	4.25					
	Tr – 60/9	9	60	50.5	4.75					
MATERIAL: Acero F.114 (C-45) Tolerancia paso ± 0.03 mm / 300 mm					MATERIAL: TrL – 14/3 y 20/4 Acero St – 60 TrL – 24/5 y 30/6 Acero C – 35 (F.113) Tolerancia paso ± 0.07 mm / 300 mm					

TUERCAS CON BRIDA DE FIJACION	REFERENCIA	∅ d	∅ Brida D ₁	∅ Anclaje D ₂	∅ D ₃	∅ Casquillo D	L	B	Tal. Anclaje		
									Para Tornillo	Nº	
	PARA HUSILLO ROSCADO	TUER – 3	15	60	50	38	25	25	10	M6	3
	TUER – 4	20	70	55	42	30	30	12	M6	4	
	TUER – 5	25	80	65	52	35	37	12	M6	4	
	TUER – 6	30	100	82	65	45	45	16	M8	4	
	TUER – 7	40	110	93	75	55	60	16	M8	6	
	TUER – 8	50	135	113	90	65	75	18	M10	6	
	TUER – 9	60	155	129	105	75	90	22	M12	6	
PARA HUSILLO LAMINADO	TUER – 3L	14	60	50	38	25	25	10	M6	3	
TUER – 4L	20	70	55	42	30	30	12	M6	4		
TUER – 5L	24	80	65	52	35	37	12	M6	4		
TUER – 6L	30	100	82	65	45	45	16	M8	4		
MATERIAL: Brida acero F.112 – Casquillo roscado Bronce S-3 (7,5% Sn)											

TUERCAS PARA HUSILLO LAMINADO	REDONDAS				EXAGONALES				
	REFERENCIA	∅ d	∅ D	L	REFERENCIA	∅ d	Sw	L	
Tuerzas redondas  Tuerzas exagonales 	KSM – 3	14	30	21	SKM – 3	14	22	21	
	KSM – 4	20	45	30	SKM – 4	20	30	30	
	KSM – 5	24	50	36	SKM – 5	24	36	36	
	KSM – 6	30	60	45	SKM – 6	30	46	45	
	MATERIAL: Acero								